



HFZT

RL201-RL207

PLASTIC SILICON RECTIFIERS

VOLTAGE RANGE: 50 --- 1000 V
CURRENT: 2.0A


FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- High surge current capability
- 2.0 ampere operation at TL=75 °C with no thermal runaway
- Low reverse leakage
- High temperature soldering guaranteed: 260 °C/10 seconds at Terminals
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

MECHANICAL DATA

- Case: JEDEC DO-15 molded plastic body
- Polarity: Color band denotes cathode end
- Mounting Position: Any

DO-15

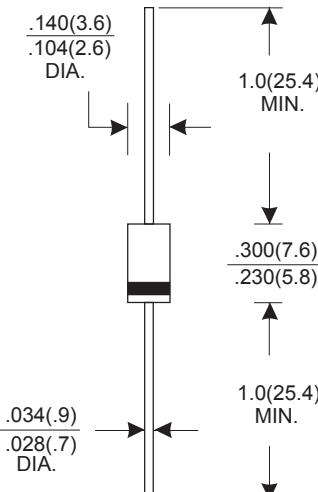

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

	Symbols	RL201	RL202	RL203	RL204	RL205	RL206	RL207	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	300	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	300	400	600	800	1000	Volts
Maximum average Forward Rectified Current 0.375"(9.5mm) lead length at TA=75°C	$I_{(AV)}$	2.0						Amps	
Peak Forward Surge Current(8.3ms)half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	70.0						Amps	
Maximum Instantaneous Forward Voltage at 2.0 A	V_F	1.1						Volts	
Maximum Reverse current at rated DC Blocking Voltage	I_R	5.0						A	
Typical Thermal Resistance(Note 2)	$R_{\theta JA}$	40.0						C/W	
Typical Junction Capacitance(Note 1)	C_J	20.0						PF	
Operating and Storage Temperature Range	T_J T_{STG}	-65 to +175						C	

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal Resistance from Junction to Ambient. 375"(9.5mm) lead length.



HFZT

RATINGS AND CHARACTERISTIC CURVES

FIG.1 - FORWARD DERATING CURVE

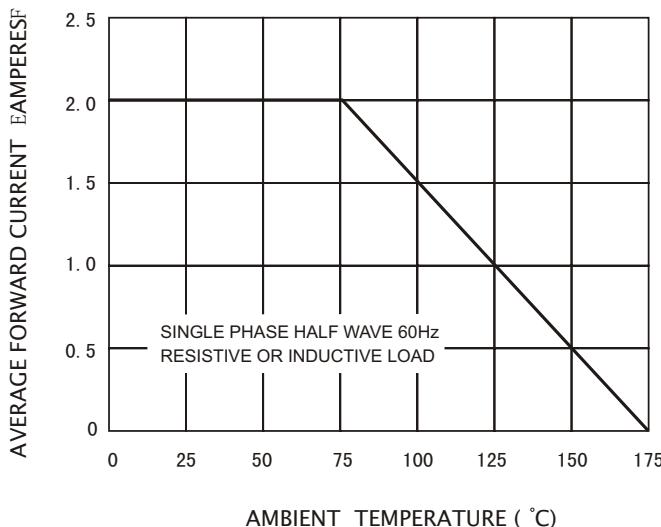


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

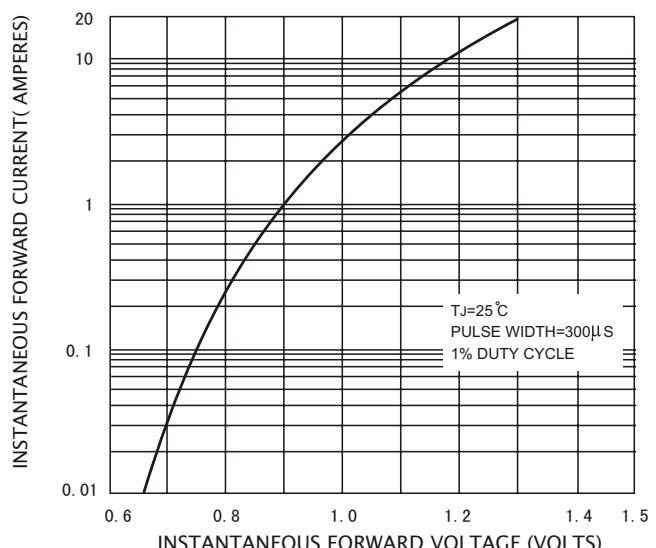


FIG.3 – MAXIMUM PEAK NON-REPETITIVE FORWARD SURGE CURRENT

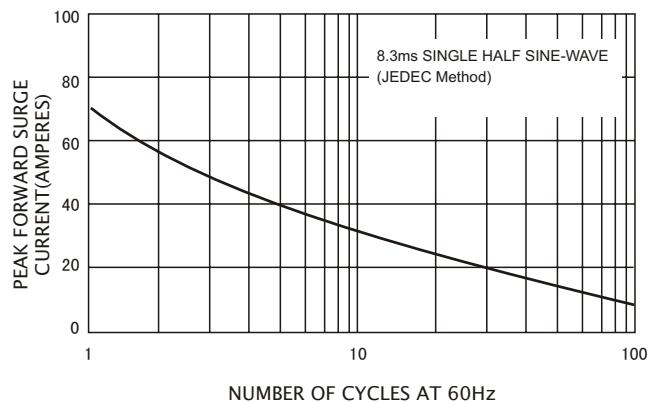


FIG.4-TYPICAL REVERSE CHARACTERISTICS

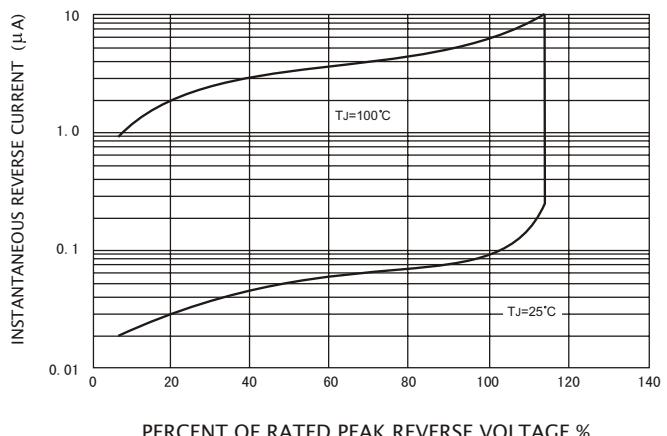


FIG.5-TYPICAL JUNCTION CAPACITANCE

