

PLASTIC SILICON RECTIFIERS

VOLTAGE RANGE: 50 --- 1000 V CURRENT: 1.5 A


FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- High surge current capability
- 1.5 ampere operation at TL=75 °C with no thermal runaway
- Low reverse leakage
- Low forward voltage drop
- Construction utilizes void-free molded plastic technique
- High temperature soldering guaranteed: 260 °C/10 seconds at terminals
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

MECHANICAL DATA

- Case: DO-15 molded plastic body
- Terminals: Lead solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any

DO-15

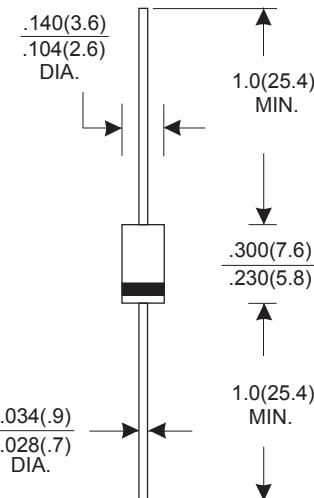

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted) Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate by 20%.

| | Symbols | RL151 | RL152 | RL153 | RL154 | RL155 | RL156 | RL157 | Units | |
|--|-----------------|--------------------|-------|-------|-------|-------|-------|-------|-------|--|
| Maximum Recurrent Peak Reverse Voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | Volts | |
| Maximum RMS Voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | Volts | |
| Maximum DC Blocking Voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | Volts | |
| Maximum average Forward Rectified Current 0.375"(9.5mm) lead length at TA=75°C | $I_{(AV)}$ | 1.5 | | | | | | Amps | | |
| Peak Forward Surge Current(8.3ms)half sine-wave superimposed on rated load (JEDEC method) | I_{FSM} | 50.0 | | | | | | Amps | | |
| Maximum Instantaneous Forward Voltage at 1.5 A | V_F | 1.1 | | | | | | Volts | | |
| Maximum Reverse current at rated DC Blocking Voltage | I_R | $T_A=25\text{ C}$ | | 5.0 | | | | | A | |
| | | $T_A=100\text{ C}$ | | 500.0 | | | | | | |
| Typical Thermal Resistance(Note 2) | $R_{\theta JA}$ | 50.0 | | | | | | °C/W | | |
| Typical Junction Capacitance(Note 1) | C_J | 20.0 | | | | | | PF | | |
| Operating and Storage Temperature Range | T_J | -65 to +175 | | | | | | °C | | |
| | T_{STG} | | | | | | | | | |

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal Resistance from Junction to Ambient.375"(9.5mm) lead length.



RATINGS AND CHARACTERISTIC CURVES

FIG.1-FORWARD CURRENT DERATING CURVE

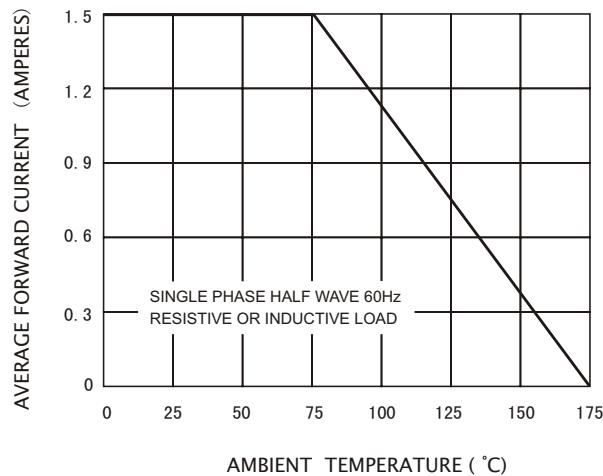


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

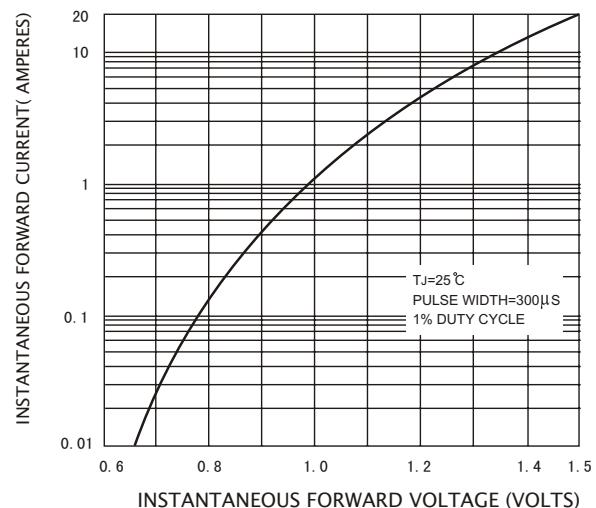


FIG.3-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

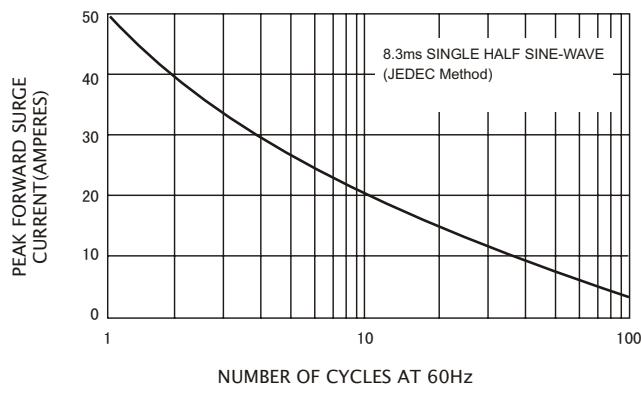


FIG.4-TYPICAL REVERSE CHARACTERISTICS

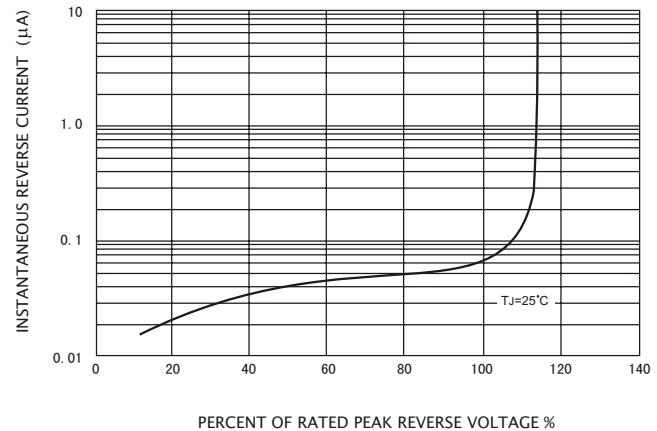


FIG.5-TYPICAL JUNCTION CAPACITANCE

